Laguna Quays: Bridge Timber Rail Inserts

For Body Corporate approval | Attention: Christine, Chairperson | From: Paul Cahill | 5 November 2026

Purpose

Replace the timber inserts in the gaps between the rock walls on both estate bridges. The rails are raised clear of the deck so storm water can pass underneath.

What is proposed

Bridge 1: 4 rails, each 2150 mm long (two per side).
Bridge 2: 2 rails, each 3600 mm long (one per side).
Timber section 300 mm wide x 200 mm high, laid flat. Rails sit 175 mm above the deck, with the top at 375 mm, just below the 400 mm rock walls. There is a 100 mm gap to the rock wall at each end.

Materials and fixing

Durable Class 1 hardwood (e.g. spotted gum) or H4 treated timber, with chamfered top edges. Each rail sits on 2 hot-dip galvanised steel brackets bolted to the deck with M12 chemical anchors, and is fixed with M12 galvanised bolts. 12 brackets in total.

Points for confirmation

1. The brief gave the timber as 300 high x 200 wide; laid that way the top would be 475 mm, above the walls, so the drawings show it laid flat (200 high).
2. Bracket fixing is proposed; the carpenter or installer may substitute an equivalent.
3. The carpenter is to check opening lengths on site before cutting.

Attached

Page 2: 3D view of both bridges.
Page 3: A3 fabrication drawing (plan, elevation, rail section, cut list).

Body Corporate approval

Approved / Approved with changes / Not approved

Comments: _____

_____


Name: _____

Signature: _____


Date: _____

Laguna Quays bridge timber rails: 3D model preview

Bridge 1: 4 rails x 2150 mm

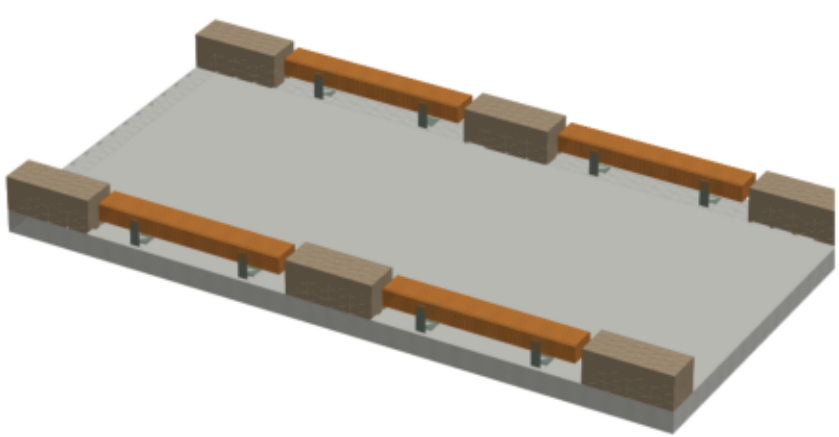


Bridge 2: 2 rails x 3600 mm

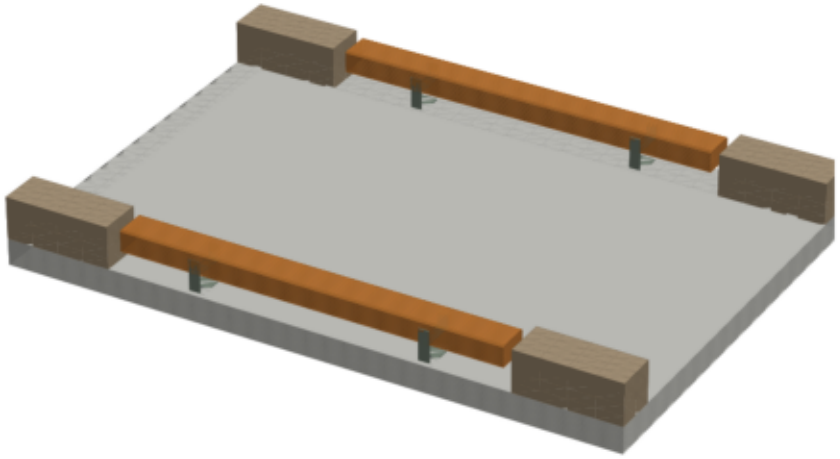


Laguna Quays — Bridge Timber Rail Inserts | Fabrication drawing for carpenter

Prepared for Christine, Body Corporate Chairperson · Client: Paul Cahill · Not for structural certification


Bridge 1 — plan of one deck edge (2 openings)

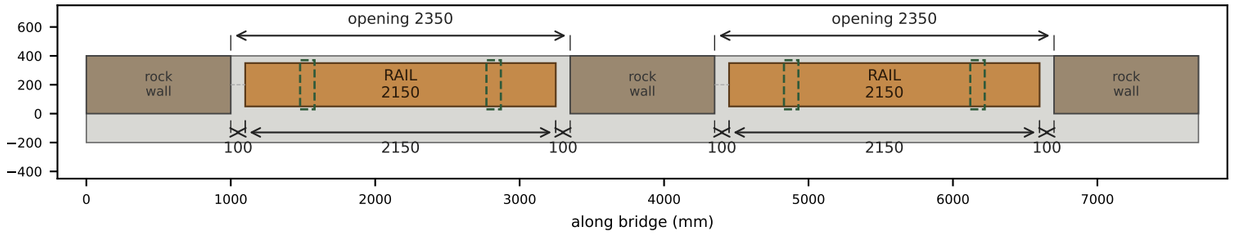


Bridge 2 — plan of one deck edge (1 opening)

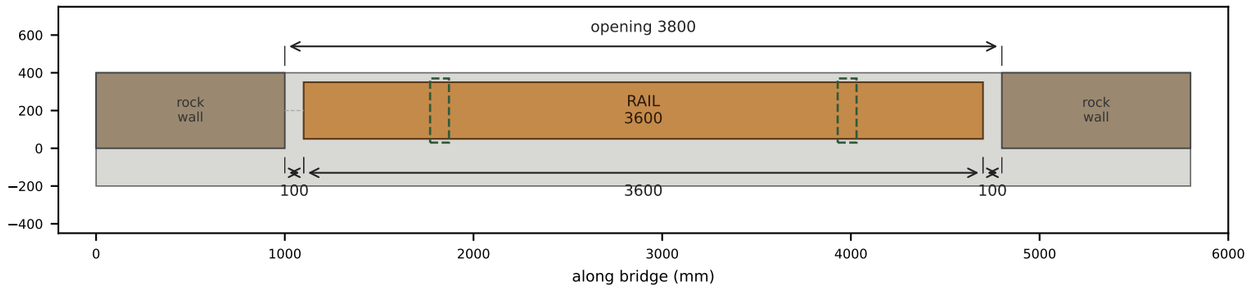

Elevation — one rail in opening (Bridge 1 shown; Bridge 2 same section, L=3600)

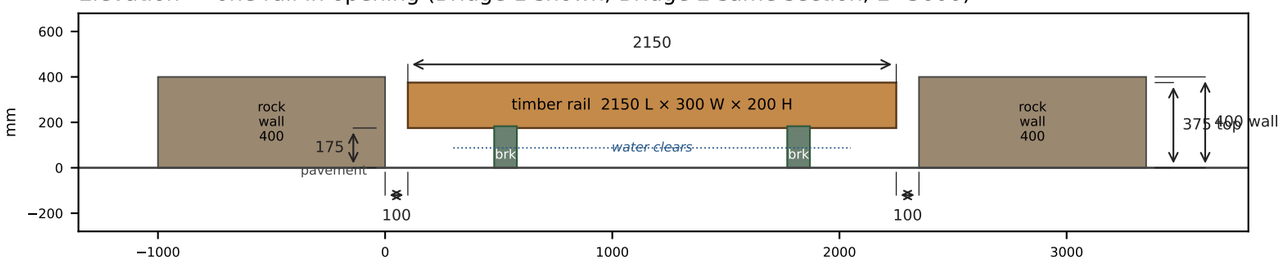

Rail cross-section + proposed bracket

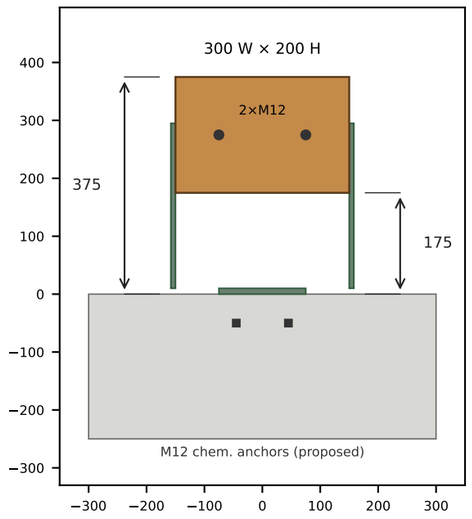

Cut list & hardware

```
TIMBER RAILS  (section 300 W × 200 H,
  laid flat — see note)
  Bridge 1:  4 × 2150 mm
  Bridge 2:  2 × 3600 mm
  Total:     6 rails

PROPOSED FIXINGS (confirm on site)
  Brackets:  2 per rail → 12 total
    HDG steel stirrup / post support
    ~100×100 seat, base plate 150 sq
  Anchors:   2 × M12 chemical / bracket
    → 24 × M12 into concrete deck
  Bolts:     2 × M12 HDG coach or
    through-bolt per bracket → 24

Timber: H4 treated hardwood / pine,
  or Class 1 hardwood (e.g. spotted gum).
  Chamfer top long edges ~15 mm.
```

Notes & assumptions

1. SECTION ASSUMED 300 W × 200 H laid flat so 175 mm clearance + 200 mm rail = 375 mm top, just below the 400 mm rock wall. The brief states H 0.3 × W 0.2; if the section is stood on the 300 edge instead, the top would be 475 mm (above the wall). CONFIRM with Christine / carpenter before cutting.

2. Gap rock-wall ↔ timber = 100 mm each end → opening = rail length + 200 mm (Bridge 1: 2350 mm; Bridge 2: 3800 mm).

3. Bridge 1: 4 rails (2 openings per side). Bridge 2: 2 rails (1 opening per side). Matches brief totals; photos show stone kerb walls with breaks over the concrete deck.

4. Deck width assumed 4000 mm kerb-outside to kerb-outside (not stated in brief). Rock-wall stubs modelled at 1000 mm long × 400 × 400; actual stub lengths follow existing stonework on site.

5. Fixings are PROPOSED only (not in brief): 2 HDG brackets per rail at ~L/5 from each end; M12 chemical anchors to deck; M12 HDG coach/through-bolts through rail. Flood-friendly: open 175 mm under rail for water to clear. Confirm embedment & edge distances with installer.

6. Model file: exports/Bridge_Rails.FCStd · Groups: Bridge_1, Bridge_2 · All dimensions in millimetres.