

Laguna Quays — Bridge Timber Rail Inserts | Fabrication drawing for carpenter

Prepared for Christine, Body Corporate Chairperson · Client: Paul Cahill · Not for structural certification


Bridge 1 — plan of one deck edge (2 openings)

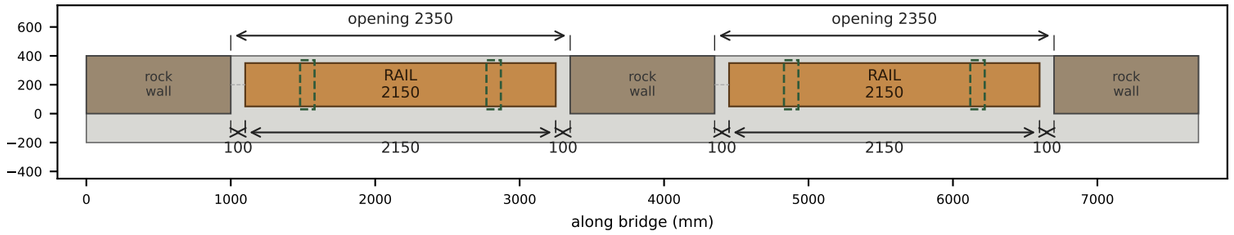


Bridge 2 — plan of one deck edge (1 opening)

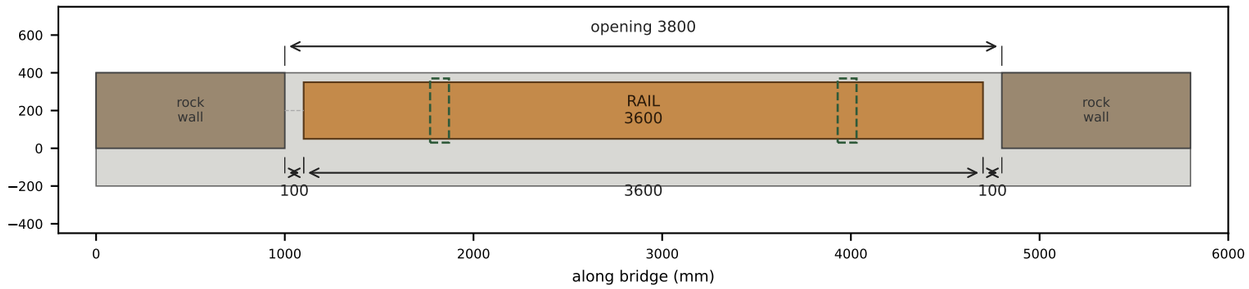

Elevation — one rail in opening (Bridge 1 shown; Bridge 2 same section, L=3600)

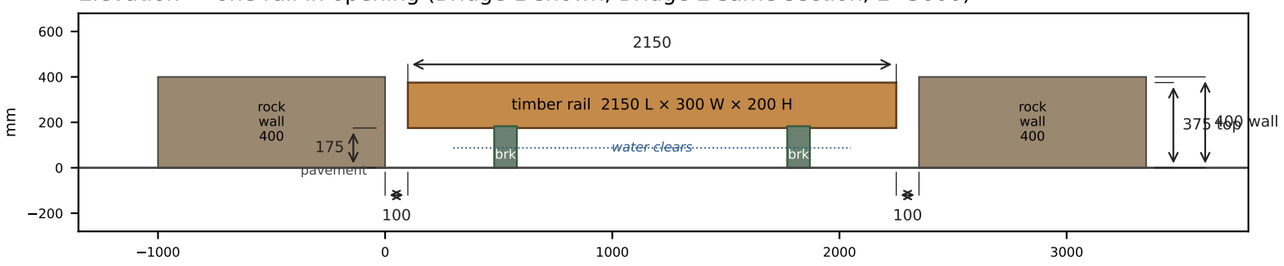

Rail cross-section + proposed bracket

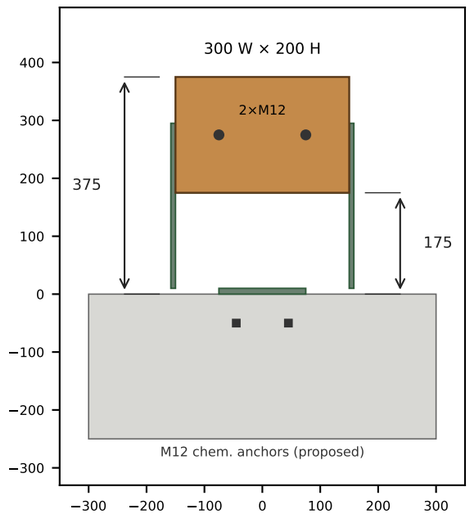

Cut list & hardware

```
TIMBER RAILS  (section 300 W × 200 H,
  laid flat — see note)
  Bridge 1:  4 × 2150 mm
  Bridge 2:  2 × 3600 mm
  Total:     6 rails

PROPOSED FIXINGS (confirm on site)
  Brackets:  2 per rail → 12 total
    HDG steel stirrup / post support
    ~100×100 seat, base plate 150 sq
  Anchors:   2 × M12 chemical / bracket
    → 24 × M12 into concrete deck
  Bolts:     2 × M12 HDG coach or
    through-bolt per bracket → 24

Timber: H4 treated hardwood / pine,
  or Class 1 hardwood (e.g. spotted gum).
  Chamfer top long edges ~15 mm.
```

Notes & assumptions

1. SECTION ASSUMED 300 W × 200 H laid flat so 175 mm clearance + 200 mm rail = 375 mm top, just below the 400 mm rock wall. The brief states H 0.3 × W 0.2; if the section is stood on the 300 edge instead, the top would be 475 mm (above the wall). CONFIRM with Christine / carpenter before cutting.

2. Gap rock-wall ↔ timber = 100 mm each end → opening = rail length + 200 mm (Bridge 1: 2350 mm; Bridge 2: 3800 mm).

3. Bridge 1: 4 rails (2 openings per side). Bridge 2: 2 rails (1 opening per side). Matches brief totals; photos show stone kerb walls with breaks over the concrete deck.

4. Deck width assumed 4000 mm kerb-outside to kerb-outside (not stated in brief). Rock-wall stubs modelled at 1000 mm long × 400 × 400; actual stub lengths follow existing stonework on site.

5. Fixings are PROPOSED only (not in brief): 2 HDG brackets per rail at ~L/5 from each end; M12 chemical anchors to deck; M12 HDG coach/through-bolts through rail. Flood-friendly: open 175 mm under rail for water to clear. Confirm embedment & edge distances with installer.

6. Model file: exports/Bridge_Rails.FCStd · Groups: Bridge_1, Bridge_2 · All dimensions in millimetres.